

Physical Dimensions

| Model # | Description | A | B | C | D |
|---------------|-------------------------------------|-----|-----|-----|-----|
| 3P-020-M02-P | Metal Bowl, Manual Drain | 3.0 | 6.8 | 3.0 | 1.5 |
| 3P-020-M02-F | Metal Bowl, Float Drain | 3.0 | 6.8 | 3.0 | 1.5 |
| 3P-020-M02-Fi | Metal Bowl, Float Drain w/Indicator | 3.0 | 7.5 | 3.0 | 1.5 |
| 3P-020-P02-P | Poly Bowl, Manual Drain | 3.0 | 6.8 | 3.0 | 1.5 |
| 3P-020-P02-F | Poly Bowl, Float Drain | 3.0 | 6.8 | 3.0 | 1.5 |
| 3P-020-P02-Fi | Poly Bowl, Float Drain w/Indicator | 3.0 | 7.5 | 3.0 | 1.5 |

Specifications

| | |
|---------------------------|---|
| Port Sizes | 1/4" |
| Thread Styles | NPT, BSPT, BSPP |
| Flow Capacity | 20 SCFM @ 100 PSI |
| Bowl Types | Aluminum Polycarbonate |
| Maximum Temp. & Pressure* | Aluminum 175°F, 200 PSIG Polycarb. 125°F, 150 PSIG |
| Filter Capacity | 1.0 Micron and Larger |
| Differential Pressure | < 5.0 PSID at Rated Flow |

*For higher pressure applications, consult factory. If unit is equipped with differential indicator, maximum temperature and pressure are 125°F and 150 PSIG regardless of bowl design.


Order Guide

| | Port Size | Metal Bowl | Metal Bowl w/Indicator | Poly Bowl | Poly Bowl w/Indicator |
|--------------|-----------|--------------|------------------------|--------------|-----------------------|
| Manual Drain | 1/4" | 3P-020-M02-P | 3P-020-M02-Pi | 3P-020-P02-P | 3P-020-P02-Pi |
| | 1/4" | 3P-020-M02-P | 3P-020-M02-Pi | 3P-020-P02-P | 3P-020-P02-Pi |
| Float Drain | 1/4" | 3P-020-M02-F | 3P-020-M02-Fi | 3P-020-P02-F | 3P-020-P02-Fi |
| | 1/4" | 3P-020-M02-F | 3P-020-M02-Fi | 3P-020-P02-F | 3P-020-P02-Fi |

Replacement Parts & Accessories

| Description | Part Number |
|--|-------------|
| Bowl O-Ring | N32-95-009 |
| Metal Bowl Assembly, Plastic Float Drain | N32-95-950 |
| Differential Indicator | N32-W1-DPi |
| Manual Drain | N32-95-182 |
| Brass Float Drain | N32-95-978 |
| Plastic Float Drain | N32-95-973 |

| Description | Part Number |
|--------------------------------|-------------|
| Replacement Element | 3P-020 |
| Blanking Cap | N32-95-020 |
| Metal Bowl, Manual Drain | N32-95-178 |
| Manual Flex Drain | N32-95-610 |
| Low Flow Plastic Drain | N32-96-400 |
| Poly Bowl, Plastic Float Drain | N32-15-160 |

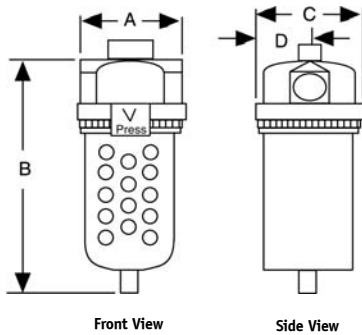

Physical Dimensions

| Model # | Description | A | B | C | D |
|---------------|-------------------------------------|-----|------|-----|-----|
| 3P-060-M04-P | Metal Bowl, Manual Drain | 3.8 | 10.0 | 3.8 | 2.0 |
| 3P-060-M04-F | Metal Bowl, Float Drain | 3.8 | 10.5 | 3.8 | 2.0 |
| 3P-060-M04-Fi | Metal Bowl, Float Drain w/Indicator | 3.8 | 11.5 | 3.8 | 2.0 |
| 3P-060-P04-P | Poly Bowl, Manual Drain | 3.8 | 10.0 | 3.8 | 2.0 |
| 3P-060-P04-F | Poly Bowl, Float Drain | 3.8 | 10.5 | 3.8 | 2.0 |
| 3P-060-P04-Fi | Poly Bowl, Float Drain w/Indicator | 3.8 | 11.5 | 3.8 | 2.0 |

Physical dimensions for the 35 SCFM units are identical to the 60 SCFM units.

Specifications

| | |
|---------------------------|---|
| Port Sizes | 1/4", 3/8", 1/2" |
| Thread Styles | NPT, BSPT, BSPP |
| Flow Capacity | 35 & 60 SCFM @ 100 PSI |
| Bowl Types | Aluminum Polycarbonate |
| Maximum Temp. & Pressure* | Aluminum 175°F, 200 PSIG Polycarb. 125°F, 150 PSIG |
| Filter Capacity | 1.0 Micron and Larger |
| Differential Pressure | < 5.0 PSID at Rated Flow |


*For higher pressure applications, consult factory. If unit is equipped with differential indicator, maximum temperature and pressure are 125PF and 150 PSIG regardless of bowl design.

Order Guide

| | Port Size | Metal Bowl | Metal Bowl w/Indicator | Poly Bowl | Poly Bowl w/Indicator |
|--------------|-----------|--------------|------------------------|--------------|-----------------------|
| Manual Drain | 1/4" | 3P-060-M02-P | 3P-060-M02-Pi | 3P-060-P02-P | 3P-060-P02-Pi |
| | 3/8" | 3P-060-M03-P | 3P-060-M03-Pi | 3P-060-P03-P | 3P-060-P03-Pi |
| | 1/2" | 3P-060-M04-P | 3P-060-M04-Pi | 3P-060-P04-P | 3P-060-P04-Pi |
| Float Drain | 1/4" | 3P-060-M02-F | 3P-060-M02-Fi | 3P-060-P02-F | 3P-060-P02-Fi |
| | 3/8" | 3P-060-M03-F | 3P-060-M03-Fi | 3P-060-P03-F | 3P-060-P03-Fi |
| | 1/2" | 3P-060-M04-F | 3P-060-M04-Fi | 3P-060-P04-F | 3P-060-P04-Fi |
| Manual Drain | 1/4" | 3P-035-M02-P | 3P-035-M02-Pi | 3P-035-P02-P | 3P-035-P02-Pi |
| | 3/8" | 3P-035-M03-P | 3P-035-M03-Pi | 3P-035-P03-P | 3P-035-P03-Pi |
| | 1/2" | 3P-035-M04-P | 3P-035-M04-Pi | 3P-035-P04-P | 3P-035-P04-Pi |
| Float Drain | 1/4" | 3P-035-M02-F | 3P-035-M02-Fi | 3P-035-P02-F | 3P-035-P02-Fi |
| | 3/8" | 3P-035-M03-F | 3P-035-M03-Fi | 3P-035-P03-F | 3P-035-P03-Fi |
| | 1/2" | 3P-035-M04-F | 3P-035-M04-Fi | 3P-035-P04-F | 3P-035-P04-Fi |

Replacement Parts & Accessories

| Description | Part Number | Description | Part Number |
|--|-------------|--------------------------------|----------------|
| Bowl O-Ring | N32-95-257 | Replacement Element | 3P-060, 3P-035 |
| Metal Bowl Assembly, Brass Float Drain | N34-95-200 | Blanking Cap | N32-95-020 |
| Differential Indicator | N32-W1-DPi | Manual Drain (for Metal Bowl) | PC-02 |
| Manual Drain (for Poly Bowl) | N32-95-182 | Poly Bowl, Brass Float Drain | N32-15-164 |
| Brass Float Drain | N32-95-978 | Poly Bowl, Plastic Float Drain | N32-15-165 |
| Plastic Float Drain | N32-95-973 | | |
| Manual Flex Drain | N32-95-610 | | |

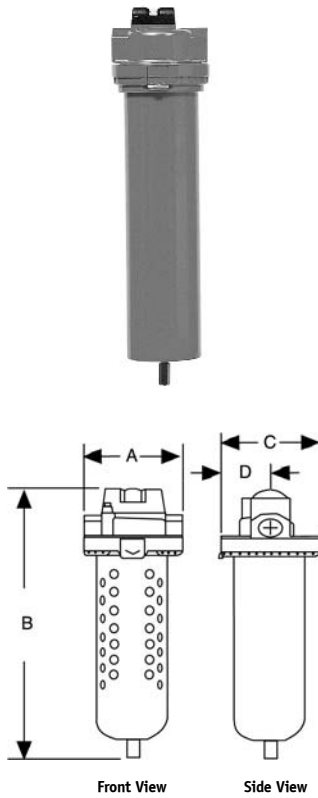

Physical Dimensions

| Model # | Description | A | B | C | D |
|---------------|-------------------------------------|-----|-------|-----|-----|
| 3P-090-M06-P | Metal Bowl, Manual Drain | 4.6 | 16.75 | 4.6 | 2.4 |
| 3P-090-M06-F | Metal Bowl, Float Drain | 4.6 | 17.5 | 4.6 | 2.4 |
| 3P-090-M06-Fi | Metal Bowl, Float Drain w/Indicator | 4.6 | 19.0 | 4.6 | 2.4 |
| 3P-090-P06-P | Poly Bowl, Manual Drain | 4.6 | 14.0 | 4.6 | 2.4 |
| 3P-090-P06-F | Poly Bowl, Float Drain | 4.6 | 14.5 | 4.6 | 2.4 |
| 3P-090-P06-Fi | Poly Bowl, Float Drain w/Indicator | 4.6 | 15.0 | 4.6 | 2.4 |

Physical dimensions for the 150 SCFM units are identical to the 90 SCFM units.

Specifications

| | |
|---------------------------|---|
| Port Sizes | 1/2", 3/4", 1" |
| Thread Styles | NPT, BSPT, BSPP |
| Flow Capacity | 90 & 150 SCFM @ 100 PSI |
| Bowl Types | Aluminum Polycarbonate |
| Maximum Temp. & Pressure* | Aluminum 175°F, 200 PSIG Polycarb. 125°F, 150 PSIG |
| Filter Capacity | 1.0 Micron and Larger |
| Differential Pressure | < 5.0 PSID at Rated Flow |

*For higher pressure applications, consult factory. If unit is equipped with differential indicator, maximum temperature and pressure are 125°F and 150 PSIG regardless of bowl design.

Order Guide

| | Port Size | Metal Bowl | Metal Bowl w/Indicator | Poly Bowl | Poly Bowl w/Indicator |
|--------------|-----------|--------------|------------------------|--------------|-----------------------|
| Manual Drain | 1/2" | 3P-090-M04-P | 3P-090-M04-Pi | 3P-090-P04-P | 3P-090-P04-Pi |
| | 3/4" | 3P-090-M06-P | 3P-090-M06-Pi | 3P-090-P06-P | 3P-090-P06-Pi |
| | 1" | 3P-090-M08-P | 3P-090-M08-Pi | 3P-090-P08-P | 3P-090-P08-Pi |
| Float Drain | 1/2" | 3P-090-M04-F | 3P-090-M04-Fi | 3P-090-P04-F | 3P-090-P04-Fi |
| | 3/4" | 3P-090-M06-F | 3P-090-M06-Fi | 3P-090-P06-F | 3P-090-P06-Fi |
| | 1" | 3P-090-M08-F | 3P-090-M08-Fi | 3P-090-P08-F | 3P-090-P08-Fi |
| | Port Size | Metal Bowl | Metal Bowl w/Indicator | Poly Bowl | Poly Bowl w/Indicator |
| Manual Drain | 1/2" | 3P-150-M04-P | 3P-150-M04-Pi | 3P-150-P04-P | 3P-150-P04-Pi |
| | 3/4" | 3P-150-M06-P | 3P-150-M06-Pi | 3P-150-P06-P | 3P-150-P06-Pi |
| | 1" | 3P-150-M08-P | 3P-150-M08-Pi | 3P-150-P08-P | 3P-150-P08-Pi |
| Float Drain | 1/2" | 3P-150-M04-F | 3P-150-M04-Fi | 3P-150-P04-F | 3P-150-P04-Fi |
| | 3/4" | 3P-150-M06-F | 3P-150-M06-Fi | 3P-150-P06-F | 3P-150-P06-Fi |
| | 1" | 3P-150-M08-F | 3P-150-M08-Fi | 3P-150-P08-F | 3P-150-P08-Fi |

Replacement Parts & Accessories

| Description | Part Number | Description | Part Number |
|--|-------------|-------------------------------|----------------|
| Metal Bowl Assembly, Brass Float Drain | N34-15-179 | Replacement Element | 3P-090, 3P-150 |
| Differential Indicator | N32-W1-DPi | Blanking Cap | N32-95-020 |
| Manual Drain (for Poly Bowl) | N32-95-182 | Manual Drain (for Metal Bowl) | PC-03 |
| Brass Float Drain | N32-95-978 | Bowl O-Ring | N32-95-256 |
| Plastic Float Drain | N32-95-973 | Poly Bowl, Brass Float Drain | N32-15-166 |